


BM-110/111 | BOUNDARY MICROPHONES



BM series condenser boundary microphone is designed for flush mounting into desktops or ceilings. Apply to televideo conferencing, recording or amplification of round table discussions and the microphones needs to be unobtrusive as possible. The microphones have excellent RF shielding effect, which makes the microphones absolutely insensitive to interference from wireless communication devices such as mobile phones. BM-110 provides a half-spherical polar pattern, making it ideal for large rooms. Due to its high sensitivity, even pick up the sound in far distance, output level won't appear large influence. The elastic bearing rings isolate the mechanical of the surface, thus the microphone can effectively isolate the mechanical noise. BM-111 half-cardioid polar pattern, which increases the gain-before-feedback and decreases the amount of diffuse ambience.

Key Features

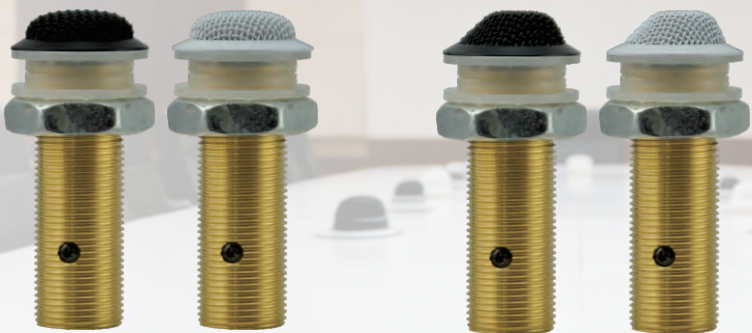

Anti-Interference

- Excellent RF shielding effect, effectively avoiding RF interference.
- High gain-before-feedback



Hidden Installation

- Apply to fix or suspended ceiling installation
- Specially design for flush mounting into desktops or ceilings.



Clear Sound Quality

- Cardioid polar pattern, high-quality speech reproduction.
- Low-impedance balance audio output, the sound is smooth and clear.
- Equipped with auto-gain audio processing circuit, effectively avoiding the feedback.



Super Strong Directivity

- Cardioid polar pattern, increase gainbefore-feedback.
- Decrease the environment noise and feedback, guarantee the vocal clarity.



Delicate Workmanship

- Heavy die-case, stable and durable alloy shell and microphone.
- The button is equipped with elastic bearing rings, minimize the coupling of surface vibration to the surface.




Convenient Installation

- Accessories: elastic bearing rings
- Installation:
The installation hole(with elastic bearing ring)Ø24mm(15/16")
The installation hole(without elastic bearing ring)Ø20mm(13/16")
The maximum thickness of the desktop/ceiling 57mm(2.25)


Product Specification



BM-110
Boundary Microphone



Polar Pattern

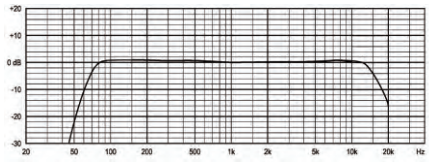


Frequency Response


Capsule:	Back of polarization electrostatic condenser type
Polar Pattern:	Hemispherical (omnidirectional)
Frequency Response:	80-18,000 Hz
Sensitivity:	18 mV/Pa = -34.4 dBV
Output Impedance:	< 200 Ω
Max. Input Sound Level:	106 dB [SPL @ 1% THD].
S/N:	68dB, 1 kHz @ 1Pa
Noise Voltage:	6.0 μV [A]
Phantom Supply:	DC12-52V
Current Consumption:	4mA (Typical)
Output Connector:	Built-in 3-pin XLRM
Weight:	95g (include nut and elastic bearing ring)
Dimension:	Length:74mm Width:20mm (steel pipe)39.5 mm(capsule ring)



BM-111
Boundary Microphone



Polar Pattern

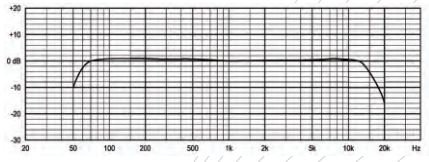

Frequency Response

Capsule:	Back of polarization electrostatic condenser type
Polar Pattern:	Hemispherical (unidirectional)
Frequency Response:	80-18,000 Hz
Sensitivity:	18 mV/Pa = -34.4 dBV
Output Impedance:	< 200 Ω
Max. Input Sound Level:	106 dB [SPL @ 1% THD].
S/N:	68dB, 1 kHz @ 1Pa
Noise Voltage:	6.0 μV [A]
Phantom Supply:	DC12-52V
Current Consumption:	4mA (Typical)
Output Connector:	Built-in 3-pin XLRM
Weight:	95g (include nut and elastic bearing ring)
Dimension:	Length:75 mm Width:20mm (steel pipe)39.5 mm(capsule ring)