


R-32AU

WIDE-BAND DIRECTIONAL ANTENNA

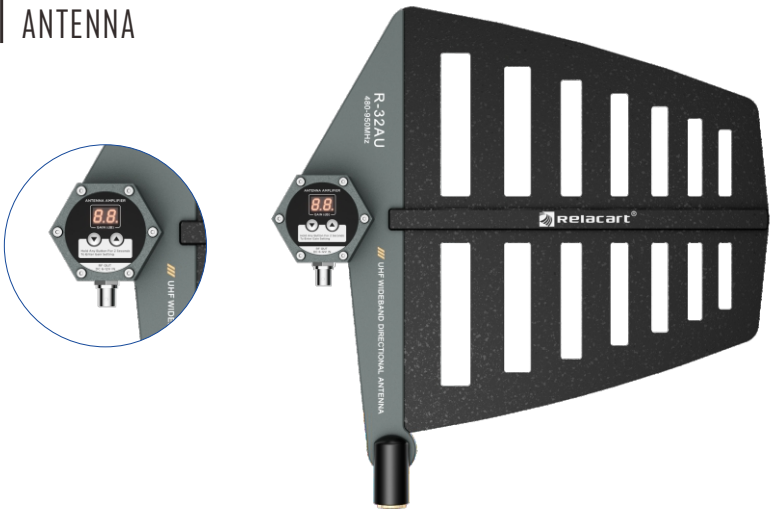

Description

The R-32AU's reliable performance and resistance to wear and tear provide the best possible reception within the required coverage. The gain setting is used for enhanced amplification of signal reception. The R-32AU can be mounted on a mic stand, suspended from the ceiling, or attached to the wall using an integrated rotatable stand.

Product Specification

Antenna Frequency Range:	470MHz~950MHz
Amplifier Frequency Range:	470MHz~950MHz
Antenna Directionality:	Cardioid
Antenna Polarization Mode:	Line
Antenna Gain:	≥6.5dB
Antenna Standing Wave Ration:	<2
Amplifier Gain:	0 to15dB
Amplifier Low Noise:	<0.45dB
Amplifier OIP3:	>38dBm
External Power Supply:	6-12V DC
Current:	75mA
Connector Port:	BNC female
Dimensions (mm):	332(L)×304(W)×3(H)
Weight(g):	Approximately 715g