

CF/GF/MS series

CONDENSER GOOSENECK
MICROPHONE WITH MUTE
SWITCH

Product Specification



CF-100
Gooseneck Microphone

CF-100 is a locking three pin balanced XLR female microphone microphone rod, which can firmly lock the base of the conference microphone to prevent various failures caused by looseness or poor contact. It has LED ring indicator light ring, which can tell the working state of the microphone through the light and dark of the light ring.

Capsule Type:Condenser

Polar Pattern:Cardioid

Frequency Response:50Hz-18KHz

Sensitivity:-47dB 1V at 1Pa

SPL:110 dB, 1KHz at 1% T.H.D

Dynamic Range(Typical):115dB, 1KHz at max. SPL

Impedance:680Ω

S/N Ratio:>52dB, 1KHz at 1Pa


Power Supply :5V DC

Consumption:4mA typical

Output Connector :Female 3-pin XLR

Dimensions450mm

Weight:About 145g

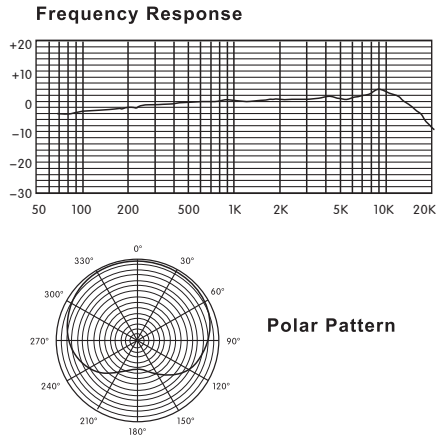



GF-101/301A/501
Gooseneck Microphone

GF-101/301/501 is a locking three pin balanced XLR female microphone microphone rod, which can firmly lock the base of the conference microphone to prevent various failures caused by looseness or poor contact. It has LED ring indicator light ring, which can tell the working state of the microphone through the light and dark of the light ring. FI shielding technology can effectively suppress external RF interference, and different appearances and lengths can be selected.

Capsule Type:Condenser

Polar Pattern:Cardioid

Frequency Response:100-15000Hz

Sensitivity:-47 dB/1kHz at 1Pa

SPL:105dB SPL/1kHz at 1% THD

Impedance:680Ω

S/N Ratio:>52dB/1kHz at 1Pa


Power Supply :5V DC

Output Connector :Female 3-pin XLR

Dimensions/Weight:GF-101: 455mm ,165g

GF-301: 415mm ,195g

GF-501: 412mm ,190g

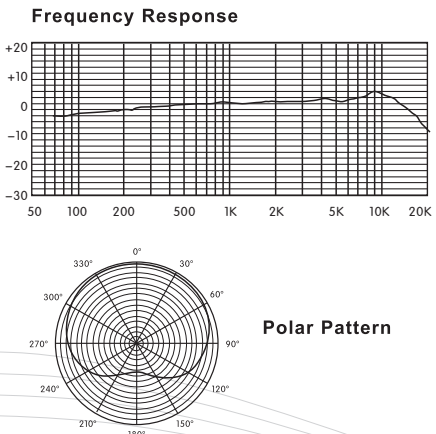



GF-901
Gooseneck Microphone

GF-901 is a locking three pin balanced XLR female microphone microphone rod, which can firmly lock the base of the conference microphone to prevent various failures caused by looseness or poor contact. It has LED ring indicator light ring, which can tell the working state of the microphone through the light and dark of the light ring. FI shielding technology can effectively suppress external RF interference.

Capsule Type:Condenser

Polar Pattern:Super Cardioid

Frequency Response:100Hz-15KHz

Sensitivity:-43dB 1V at 1Pa

SPL:110 dB, 1KHz at 1% T.H.D

Impedance:680Ω


S/N Ratio:>55dB, 1KHz at 1Pa

Power Supply :5V DC

Output Connector :Female 3-pin XLR

Dimensions310mm

Weight:About 170g

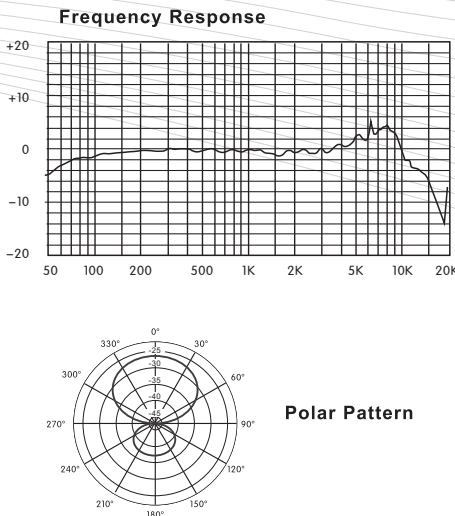

Product Specification



GF-902
Gooseneck Microphone

GF-902 is a locking three pin balanced XLR female microphone microphone rod, which can firmly lock the base of the conference microphone to prevent various failures caused by looseness or poor contact. It has LED ring indicator light ring, which can tell the working state of the microphone through the light and dark of the light ring. FI shielding technology can effectively suppress external RF interference.

Capsule Type:Condenser

Polar Pattern:Super Cardioid

Frequency Response:50Hz-20KHz

Sensitivity:-20dB +/-3dB(0dB=1V/Pa,f=1KHz)

SPL:110dB(THD<5%, f=1KHz)

S/N Ratio(A weighted):>100dBA(THD<1%,f=1 KHz)

Distortion:<0.1%


Power Supply :5V DC

Output Connector :XLRM

Dimension (mm):285 (L)

Weight:About 180g

Color:metallic gray

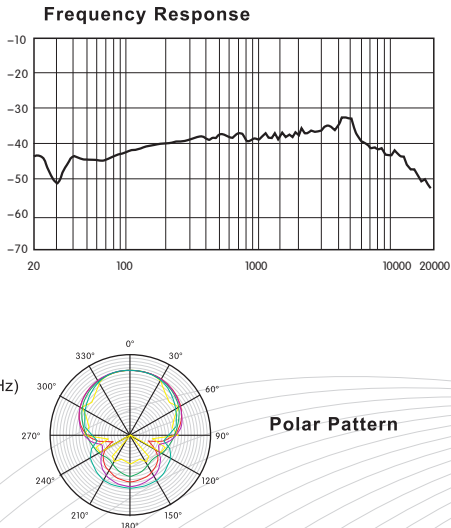



MS-923/GF-923
Detachable Square
Microphone

The MS-923/933 is a microphone with a three pin XLR female. The new square microphone tube and condenser cardioid microphone capsule can accurately pick up the sound and reduce the interference of environmental noise by using the principle of low terminal sensitivity. With 48V phantom power supply, it can support multiple bases within the rated voltage, and provide stable power supply for the microphone to reduce the occurrence of faults.

Capsule Type:Condenser

Polar Pattern:Super cardioid

Frequency Response:100Hz-15KHz

Sensitivity:>65dB 1V at 1Pa

Impedance:420Ω

SPL:125 dB, 1KHz at 1% T.H.D

Dynamic Range(Typical):100dB, 1KHz at max. SPL

S/N Ratio:>52dB, 1KHz at 1Pa

Power Supply :MS-923/MS-933:24-52V DC

GF-923/GF-933:5V DC

Consumption:5mA typical


Output Connector :Female 3-pin XLR

Dimensions (mm):225(L)×42×87

Weight:About 355g

Color:MS-923 /GF- 923 : Black

MS-933 /GF-933: Champagne Gold

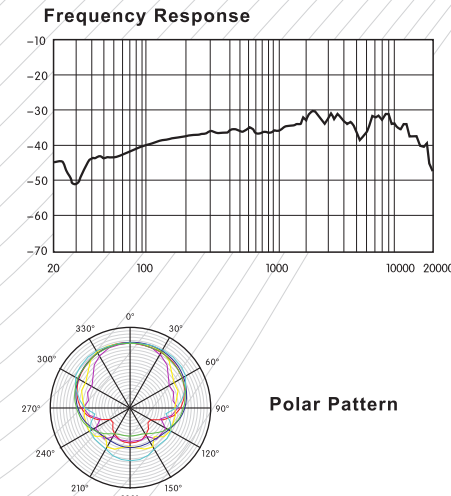



MS-933/GF-933
Detachable Square
Microphone