


HEADWORN MICROPHONES

Product Specification




Frequency Response:

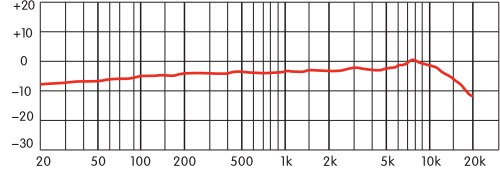

Element: Back
Polar Pattern : Unidirectional
Sensitivity : -47dB ±2dB
Output Impedance : ≤2.2KΩ
S/N Ration : ≥58dB
Dimensions of capsule : Φ6.0×5.0mm
Frequency Response : 45Hz-18KHz
Power Supply : 2-10V DC
Cable : 1.2m
Connector: Mini XLR-4P


Polar Pattern



HM-500(S/B)
Unidirectional




Frequency Response:

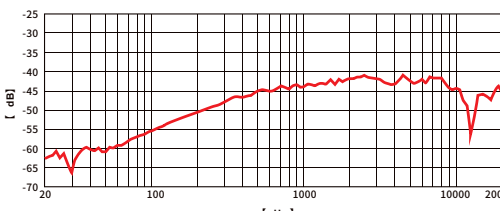


Element: Back Electret Condenser
Frequency range: 50Hz-15KHz
Directivity: Unidirectional
Sensitivity: -42dB ± 1.5dB at 1KHz (0dB=1V/Pa)
Output Impedance: 2.2KΩ ± 5% at 1KHz
Total harmonic distortion: THD 0.8%/1KHz
Max. SPL: 94dB/SPL
S/N Ration: >65dB
Dimensions of capsule: Φ6.0×3.0mm
Connector: 3.5mm plug
Weight: About 23.9g
Color: Skin


Polar Pattern



HM-P06
Unidirectional

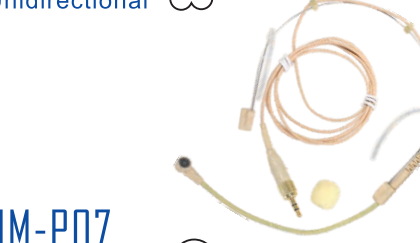


Frequency Response:

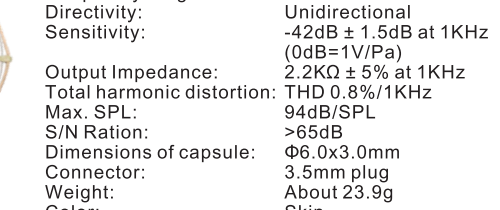

Element: Back Electret Condenser
Frequency range: 50Hz-15KHz
Directivity: Unidirectional
Sensitivity: -42dB ± 1.5dB at 1KHz (0dB=1V/Pa)
Output Impedance: 2.2KΩ ± 5% at 1KHz
Total harmonic distortion: THD 0.8%/1KHz
Max. SPL: 94dB/SPL
S/N Ration: >65dB
Dimensions of capsule: Φ6.0×3.0mm
Connector: 3.5mm plug
Weight: About 23.9g
Color: Skin


Polar Pattern



HM-P07
Unidirectional




Frequency Response:

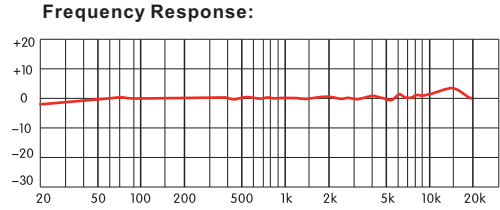

Element: Back Electret Condenser
Polar Pattern : Omnidirectional
Sensitivity : -40.5dB ±2dB
Output Impedance : ≤2.2KΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response : 20Hz-18KHz
Power Supply : 2-10V DC
Cable : 1.2m
Connector: Mini XLR-4P

Polar Pattern




HM-600(S/B)
Omnidirectional

LAVALIER MICROPHONES

Product Specification




Frequency Response:

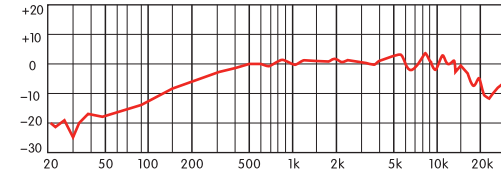

Element: Back
Polar Pattern : Unidirectional
Sensitivity: -45dB
Output impedance: ≤1.8kΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response: 60-12000 Hz
Power Supply: 2-10V DC
Cable: 1.2m
Connector: Mini XLR-4P


Polar Pattern



LM-C480
Unidirectional




Frequency Response:

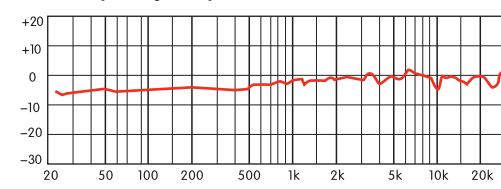

Element: Back Electret Condenser
Polar Pattern: Omnidirectional
Sensitivity: -41dB
Output impedance: ≤1.8kΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response: 60-12000 Hz
Power Supply: 2-10V DC
Cable: 1.2m
Connector: Mini XLR-4P

Polar Pattern




LM-C550
Omnidirectional

MINI HEADPHONE PLUG UNIDIRECTIONAL MICROPHONE




Frequency Response:

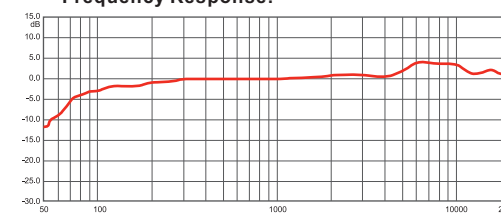

Polar Pattern : Unidirectional
Sensitivity: -32dB±3dB(0dB=1V/Pa)
Output Impedance: 2.2KΩ
Maximum SPL: 120.4dB
SN: 64dB
Frequency Response: 50Hz-20KHz
Microphone Size: Φ8.6×33.7mm
Windshield Size: Φ14mm×15mm
Output Connector: 3.5mm
Weight: 5.5g

Polar Pattern



LM-P06
Unidirectional