


# R-14D | WIDEBAND 4-CHANNEL ANTENNA DISTRIBUTION SYSTEM



R-14D is a dual quadripartition antenna distribution system with super wide frequency band, strong power output as well as ultra low distortion. Advanced technology, reliable performance, delicate appearance, compatible to UHF diversity wireless system.

## Product Specification

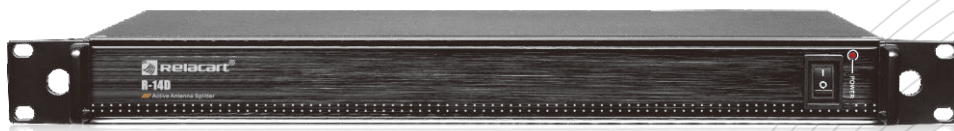

### R-14D

Antenna Distribution System

- Support one pair antenna, two to four pieces of Relacart wireless system or other brand wireless system. Simplify the antenna setup and increase system working efficiency
- Precise circuit design, ultra low noise, low inter modulation distortion, can eliminate the interference from mixed frequency when multiple frequencies are working simultaneously.
- Antenna input jack compatible with R-32AU and R-22AU directional antenna, enabling large area, multiple direction and far distance wireless transmission, make sure the signal reception is stable.

Frequency Range:	470MHz ~ 950 MHz
Gain of Output:	0dB ±1dB
Input Impedance:	50Ω
Output Impedance:	50Ω
Power Supply of Antenna Input:	+8+V DC
Power Supply of Receiver:	Each antenna input port supplies bias +12V DC, 150mA max.
Current Drain:	800mA
Power Supply:	100-240V, AC 50/60 Hz
Dimensions (mm):	410(W)×206(D)×43(H)
Weight:	2.5kg